# Technical Data Sheet

Paint Protection Film

ULTRAFIT™

# XP RETRO TUSCAN YELLOW

## Information

**ULTRAFIT XP RETRO TUSCAN YELLOW** is a high performance, self-adhesive, hydrophobic polyurethane film designed to protect automotive paint from harmful effects of stone chips and abrasion. It achieves the perfect balance of class and bold attitude, enhancing your vehicle's style with a retro-inspired matte finish.

Recommended Shelf Life 2 years from date of purchase*
Recommended Storage Conditions 72°F (22°C) @ 50% RH

## Characteristics

- Color Matte
- Hydrophobicity
- Shock absorbent
- Self-Heal

## Product Structure

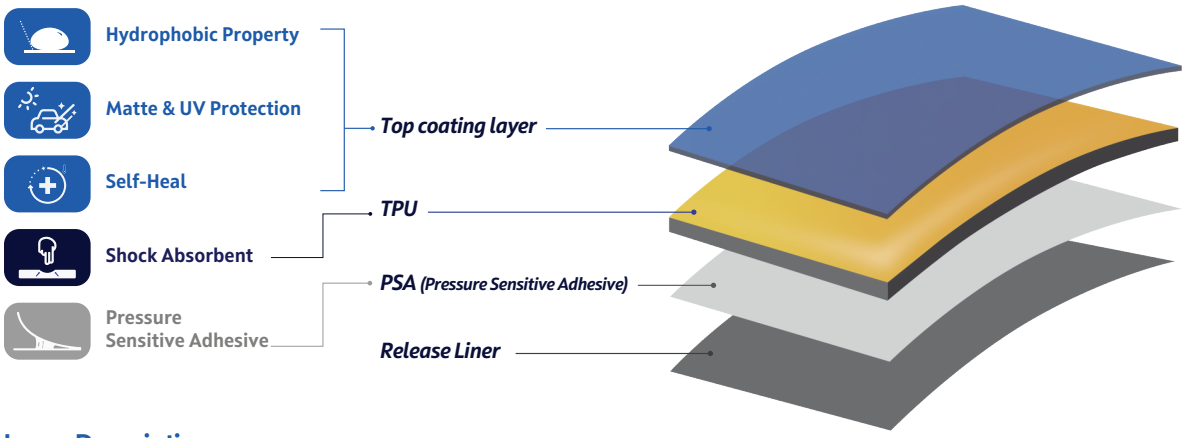


### Layer Descriptions

**TPU** Impact-resistance

**Product Thickness** 9mil

| PROPERTIES | | TYPICAL VALUES | STANDARD |
|---|---|---|---|
| Peel Adhesion | | 2.0 ± 0.4 kg/in² (30 min) | ASTM D3330 |
| | | 2.2 ± 0.5 kg/in² (1 hr) | |
| Gloss | | N/A | ISO 2813 |
| Haze | | N/A | ASTM D-1003 |
| Tensile Strength | | 5,000 ± 250 psi | ASTM D-412 |
| | | 37.47 ± 2 MPa | |
| Elongation | | >200 | ASTM D-412 |
| Durability | | ΔE ≤ 2 (1,000 hr) | ASTM G154 |
| Q-UV | UVA Bulb | <1% | 8 hours 50°C UV exposure |
| | | <1% | 4 hours 60°C condensation |

* If installing film after recommended shelf-life, re-certification by ULTRAFIT is required.

**Notice**
The performance representations and suitability for use described in this Technical Data Sheet are intended as a guide only. Since the specific conditions of product use are known only to the user, it is the user's responsibility to determine whether the product is suitable its intended application.